

WALL FAN HEATER

ARWF SERIES



THE GOLD STANDARD IN FAN HEATERS

The PULSAIR™ is extremely popular for many reasons. First, it can be recessed or surface mounted with a surface adapter (optional). In addition, it can be mounted vertically or horizontally, directing the air flow upward or downward and to the right or to the left, respectively. Last, the slim-line PULSAIR™ can be recessed into a wall thickness of 2 in. to 3 in. While it's a winning heating solution for the hallway and bathroom, it can also be installed in other parts of the house, such as the office or in commercial buildings. Its nichrome element provides instant heat. Available from 500 W to 2000 W, and from 120 V to 277 V, the PULSAIR™ is recognized and recommended by those in the know.



THE QUIETEST WALL FAN HEATER ON THE MARKET

NICHROME ELEMENT FOR INSTANT HEAT

MULTIPLE INSTALLATION OPTIONS

RECESSED, SURFACE MOUNTED, HORIZONTAL OR VERTICAL

THE MOST RESISTANT GRILLE ON THE MARKET

IDEAL FOR:

HALLWAYS, BATHROOMS, LOCKER ROOMS, OFFICES

COLORS

- standard: white, soft white
- ORORA (optional): denim blue, midnight blue, turquoise, moss green, canary yellow, red, orange, anodized aluminum paint, gravel gray, charcoal, espresso, almond, black (refer to www.stelpro.com/en-US/orora)

FINISH

epoxy-polyester powdercoat

MANUFACTURING

- 20-gauge steel cabinet and 18-gauge steel grille
- quiet fan - 40 CFM (500 W to 1000 W models) - 75 CFM (1250 W to 2000 W models)
- thermal protection with automatic reset
- dual wattage (DW) in some models (see "DW" in technical specifications table)

ELEMENT

nichrome element produces instant heat

CONTROL

- built-in thermostat (optional)
- wall thermostat (not included) - the use of an electronic thermostat is strongly recommended

INSTALLATION

- wall mounted
- recessed (wall must have a depth of 2 3/8 in. minimum)
- surface mounted with surface adapter (optional)
- four installation positions

ACCESSORIES

PRODUCT	DESCRIPTION
ARWFT1**	built-in single pole thermostat [120 V-347 V]
ARWFT2*	built-in double pole thermostat [120 V-347 V]
RWFSAW	surface adapter (white)
RWFSASW	surface adapter (soft white)
RWFDIS250*	disconnect switch [120 V-250 V] [17 A @ 120 V-12 A @ 250 V] [Unit without thermostat]
RWFDIS250T*	disconnect switch [120 V-250 V] [17 A @ 120 V-12 A @ 250 V] [Unit with thermostat]
RWFDIS600*	disconnect switch [277 V-600 V] [Unit without thermostat]
RWFDIS600T*	disconnect switch [277 V-600 V] [Unit with thermostat]
ARWFBB	back box

* Add W for white or SW for soft white

* Supplied with a white knob (with a white grille), a soft white knob (with a soft white grille) and a black knob (with any other color grille)


* Factory installed

TECHNICAL SPECIFICATIONS

WITHOUT CONTROL	BUILT-IN SINGLE POLE THERMOSTAT	BUILT-IN DOUBLE POLE THERMOSTAT	POWER	VOLTAGE	FLOW	WEIGHT
CODE	CODE	CODE	WATTS	VOLTS	CFM	LB
ARWF1001	ARWF1001T	ARWF1001T2	1000/500 (DW)	120	40	6
ARWF1008	ARWF1008T	ARWF1008T2	1000/500 (DW)	208	40	6
ARWF1002	ARWF1002T	ARWF1002T2	1000/500 (DW)	240	40	6
ARWF1007	ARWF1007T	ARWF1007T2	1000	277	40	6
ARWF1501	ARWF1501T	ARWF1501T2	1500/750 (DW)	120	75	6
ARWF1508	ARWF1508T	ARWF1508T2	1500/750 (DW)	208	75	6
ARWF1502	ARWF1502T	ARWF1502T2	1500/750 (DW)	240	75	6
ARWF1507	ARWF1507T	ARWF1507T2	1500	277	75	6
ARWF2008	ARWF2008T	ARWF2008T2	2000/1000 (DW)	208	75	6
ARWF2002	ARWF2002T	ARWF2002T2	2000/1000 (DW)	240	75	6
ARWF2007	ARWF2007T	ARWF2007T2	2000	277	75	6

Add W for white or SW for soft white (see www.stelpro.com/en-US/orora for optional colors and contact your °STELPRO representative for more information)
 Add WBB for the model without back box
 (DW) - dual wattage

TECHNICAL DRAWINGS

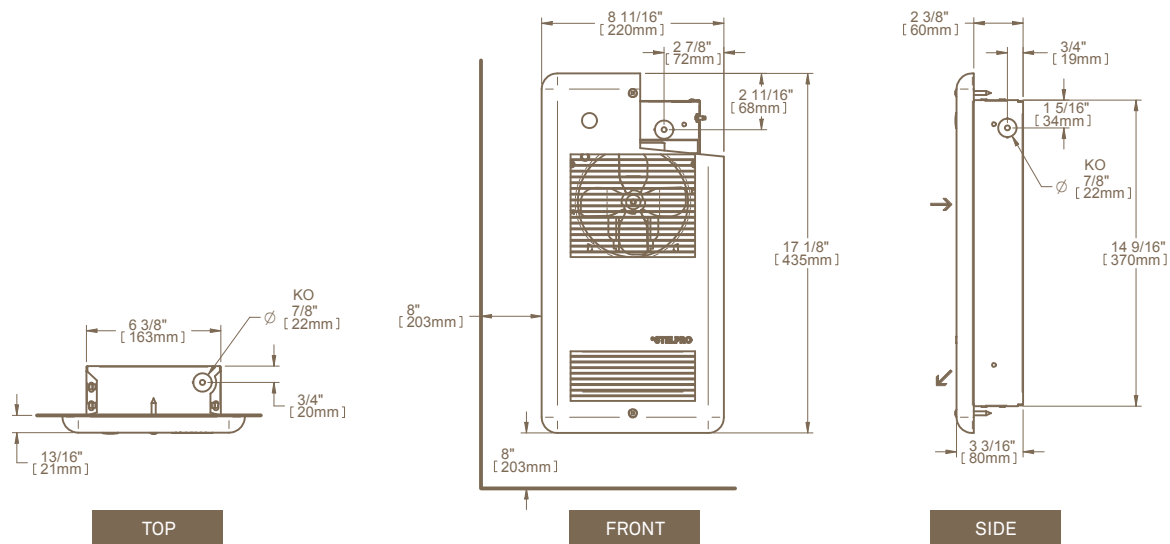

4 INSTALLATION OPTIONS

